
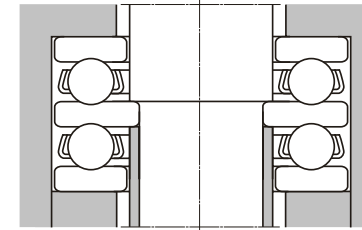


double-direction thrust ball bearings with flat back face

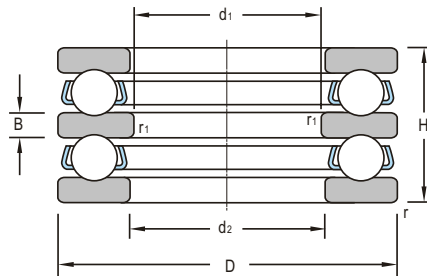

d 350~1420mm

Boundary Dimensions							Basic Load Ratings		Limiting Speeds	
$d_1$	$d_2$	$D$	$H$	$B$	$r_{min}$	$r_{1min}$	Dynamic C	Static $C_0$	Grease	Oil
mm							kN		r/min	
350	400.4	440	70	36	1.5	1.5				
865	940	1030	110	28	2.1	1.1	796	4272	280	400
845	950.8	1030	120	28	2.1	1.1	796	4272	260	370
		1030	110	28	2.1	1.1	796	4272	280	400
1049.5	1050	1250	220	77	5	3	1223	9989	99	142
1070	1181	1280	145	35	2.5	1.1	1192	7680	150	220
1420	1520	1720	270	61	7.5	7.5	2616	20520	51	73

Bearing Designations		Mass
Present	Original	
		kg
	9038980	21.7
527/940	389/940	135
527/950.8	387/950	144
527/950.8YB2	388/950	136
2327/1049/YA	2687/1049	408
527/1181	389/1181	243
527/1520	387/1520	693